

SIG SAUER® INFINITE GUARANTEE®



SIG SAUER® has a history of quality and reliability that dates back more than 250 years. We understand the importance of true dependability whether it be in the line of duty, at the shooting range or on your next hunt and we continually strive to deliver products that meet and exceed the expectations of even the most demanding customers. That's why SIG SAUER is proud to offer our INFINITE GUARANTEE™ on all our firearms, optics, and suppressors.

Our promise: We warrant that your new SIG SAUER firearm, optic, or suppressor was originally manufactured free of defects in material, workmanship, electrical, optical, and mechanical function. We will repair your SIG SAUER

product in the event it becomes damaged or is defective in any way, at no charge to you. If we cannot repair your product, we will replace it or, if we cannot replace it, we will provide you with a replacement of equal value. All with no questions asked, forever.

SIG SAUER® Infinite Guarantee®

- Fully Transferable
- No Receipt Required
- No Charge
- No Warranty Card Required
- No Time Limit Applies

Please note that our Infinite Guarantee excludes coverage for intentional damage, misuse, cosmetic damage that does not affect the performance of the optic, loss, theft, or unauthorized repair or modification. Excludes Tritium components.

Customers seeking warranty coverage must first obtain a Return Merchandise Authorization (RMA) by contacting SIG SAUER Customer Service and return the product unloaded and freight prepaid.

ANY WARRANTIES IMPLIED BY LAW, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY LIMITED IN DURATION TO THE DURATION OF THIS WRITTEN WARRANTY PERIOD. REPAIR, ALTERATION, OR REPLACEMENT AS PROVIDED HEREIN IS YOUR EXCLUSIVE REMEDY FOR ANY DEFECTIVE PRODUCT. IN NO EVENT SHALL SIG SAUER OR ANY COMPANY AFFILIATED WITH SIG SAUER BE LIABLE FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY KIND ARISING OUT OF THE PURCHASE OR USE OF THIS PRODUCT, WHETHER BASED UPON CONTRACT, TORT, STATUTE, OR OTHERWISE. Some states do not allow the limitation of implied warranties, or the exclusion or limitation of incidental or consequential damages, so some or all of the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State.

This warranty applies to commercial customers only and does not apply to government, non-commercial, or non-US customers. Non-US COMMERCIAL CUSTOMERS MUST PURCHASE PRODUCT THROUGH AN AUTHORIZED SIG SAUER DEALER WITHIN THEIR COUNTRY OF RESIDENCE FOR THIS WARRANTY TO APPLY.

BUTTON BATTERY WARNING INFORMATION

⚠ WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH** of **CHILDREN**.
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



- Keep the battery in its original packaging until ready to use.
- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- For treatment information call, The National Battery Ingestion Hotline (NBIH) 1-(800) 498-8666.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.
- Compatible battery: CR2032 Nominal voltage: 3V
- Do not mix old and new batteries, different brands or types of batteries, such as alkaline, carbon-zinc, or rechargeable batteries.
- Ensure the batteries are installed correctly according to polarity (+ and -).
- Remove and immediately recycle or dispose of batteries from equipment not used for an extended period of time according to local regulations.
- Non-rechargeable batteries are not to be recharged.
- Do not force discharge, recharge, disassemble, heat above 212°F (100°C) or incinerate. Doing so may result in injury due to venting, leakage or explosion, resulting in chemical burns.
- Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep them away from children.

NOTICE: Export restrictions may apply – this product may be controlled either by the ITAR or EAR.

 WARNING: CANCER AND REPRODUCTIVE HARM—www.P65warnings.ca.gov

FOR PRODUCT SERVICE ON THIS MODEL,
PLEASE CALL 603-610-3000

12100 SW Tualatin Rd, Tualatin, OR 97062 USA



sigsauer.com



ROMEO5™ GEN II

1X20 MM COMPACT ILLUMINATED DOT SIGHT

OPERATOR'S MANUAL



Additional information about SIG SAUER products, SIG SAUER Academy and the SIG Experience Center, Special Programs, and additional support can be found by scanning the QR code below to visit sigsauer.com.

INTRODUCTION

Congratulations on your purchase of the SIG SAUER® ROMEO5 GEN II line of Illuminated Dot Sights, providing a compact 1x enclosed aiming solution for today's carbine platforms. By combining efficient LED's with industry leading lens coatings the ROMEO5 GEN II achieves 40,000 hrs of runtime - while the entire sight gets a complete, ruggedized overhaul.

The ROMEO5 GEN II Line of Illuminated Dot Sights is covered by SIG SAUER® Infinite Guarantee™.

CONTENTS:


- ROMEO5 GEN II Illuminated Dot Sight
- M1913 Low Mount (Select SKU's)
- M1913 I-BEAM Mount
- Rubber Bikini Lens Cover
- Multi-Tool
- T20 L-Key
- CR2032 Battery
- Lens Cleaning Cloth
- Operator's Manual

KEY FEATURES:


- High performance lens coatings for excellent light transmittance, glare control, and durability for all situations
- 2 MOA red dot or green dot (standard models)
- Quad Ballistic Circle Dot 2.0 in (Elite models)
- Ultra-compact size and weight with unlimited eye-relief and parallax free operation
- 40,000 hour runtime
- M1913 I-BEAM Mount for situational awareness in all conditions
- Dependable IPX-7 waterproof and fog proof performance
- SIG SAUER® Infinite Guarantee™

PRODUCT IDENTIFICATION:

- A. Windage Adjustment
- B. Elevation Adjustment
- C. Battery Compartment
- D. Illumination Controls (+ & -)
- E. T20 Torx® Mount Cross Bolt
- F. Mounting Screws

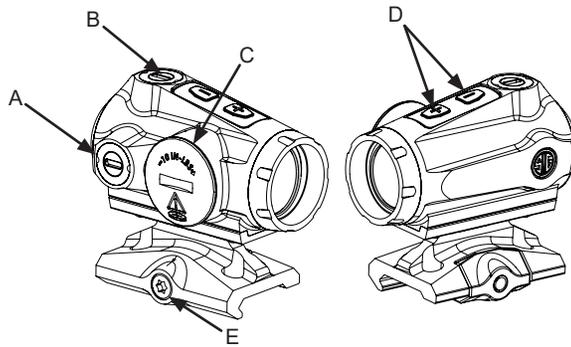


TORQUE SPECS	DRIVER	TORQUE
ROME05 GEN II I-BEAM [E]	T20	65 in-lbs
ROME05 GEN II Low Mount [E] [Select SKU's]	T20	65 in-lbs
Mounting Screws [F]	T10	22 in-lbs
Battery Cap [C]	Flat Head	10 in-lbs

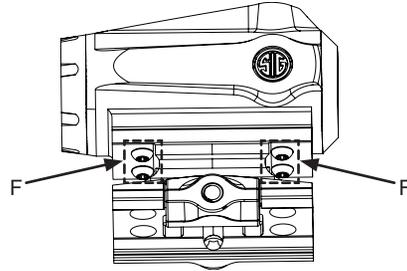

ROME05 GEN II SPECIFICATIONS

Magnification	1x	Windage Adjustment:	100 MOA
Center Dot Size	2 MOA [Standard Models], 1 MOA [Elite Models]	Adjustment Travel Per Click:	0.5 MOA
Circle Diameter:	65 MOA [Elite Models]	Waterproofing:	IPX-7
Ballistic Holdover Dot Size:	0.7 MOA [Elite Models]	Length A:	2.7 in / 69.7 mm
Ballistic Dot Holds:	6 MOA, 10 MOA, 16 MOA [Elite Models]	Width B:	1.6 in / 39.6 mm
Clear aperture:	20 mm	Height C [Standard & Elite Models]:	2.4 in / 61.5 mm
Illumination Settings:	10 Day / 2 NV	Height C [Tall Models]:	2.8 in / 70.7 mm
Sight to Optical Axis:	1.41" [Standard Models & Elite], 1.93" [Tall Models]	Weight [Standard & Elite Models]:	5.5 oz / 155 g
Elevation Adjustment:	100 MOA	Weight [Tall Models]:	5.6 oz / 159 g

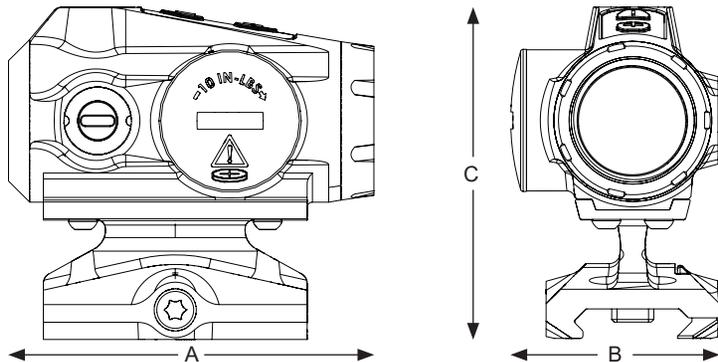

WARNING UNLOAD/CLEAR



IF THE OPTIC IS MOUNTED TO A FIREARM, ALWAYS ENSURE THAT THE FIREARM IS UNLOADED AND CLEARED WITH THE SAFETY ON BEFORE ADJUSTING THE SIGHT OR CHANGING THE BATTERY.

OPERATION

Installing the Battery

The battery compartment (C) is located on the right side of the sight. Use a coin, flathead, spare CR2032 battery or included multi-tool to unscrew the cap counterclockwise. Install the CR2032 coin cell with the + terminal facing up. It should snap firmly into the contacts. Reinstall the battery cap by rotating the cap in the clockwise (CW) direction to 10 in-lbs.

NOTE

Failure to properly torque the battery cap in a clockwise (CW) direction to 10 in-lbs could lead to an ingestion hazard of the coin battery, intermittent LED illumination, or allow moisture into the battery compartment.

Turning Sight On and Off / Illumination Control

- Power - To turn sight on or off, press and hold either the (+) or (-) button on the top.
- The sight features MOTAC™. It will automatically turn off after 120 seconds of inactivity. As soon as the sight senses motion it will automatically power back on to the current setting.
- Brightness Control - To increase or decrease the reticle brightness tap (+) or (-) button on top. Sight has 10 day time and 2 NV settings.
- Reticle Selection (Elite Models Only) - With sight powered on, press and hold both (+) and (-) buttons simultaneously. This will scroll through available reticle options. Release the buttons to lock-in desired reticle.

MOUNTING THE SIGHT

- The ROME05 GEN II is intended for use on most types of firearms with MIL-STD 1913 Picatinny Rail. The sight can be mounted anywhere on the rail; forward or back.
- To install the sight on a firearm, set the mount on the rail at your preferred eye relief, push the sight forward into the rail lugs and torque the T20 Torx bolt (E) to 65 in-lbs.
- Note: An optional low mount may be included. To install the low mount, use the T10 driver to remove and set aside the (4) mounting screws (F) located in the bottom of the sight. Remove the original mount. Install the low mount and torque the (4) mounting screws to 22 in-lbs.

SIGHT ADJUSTMENTS

- Elevation adjustments - Using the provided multi-tool, coin, or shell casing, turn the Elevation Adjustment [B] counterclockwise (CCW) to move the Point of Impact (POI) UP. To move the POI DOWN, rotate clockwise (CW). Each click moves the POI 0.5 MOA.
- Windage Adjustments - Using the provided multi-tool, coin, or shell casing, turn the Windage Adjustment [A] counterclockwise (CCW) to move the POI RIGHT. To move the POI LEFT, rotate clockwise (CW). Each click moves the POI 0.5 MOA.

MAINTENANCE

CAUTION

ALWAYS BLOW DUST OR DEBRIS FROM THE LENSES PRIOR TO USING ANY CLOTH OR LENS PEN. FAILURE TO DO THIS MAY RESULT IN SCRATCHING THE LENSES.

- Cleaning - Keep the lenses clear by using a soft cloth (provided) or lens pen.
- Protect the lenses by using the provided rubber bikini cover during storage and transport.

TROUBLE SHOOTING

POI changes between groups, when shooting from a set distance:

- Check that the mounting screws and cross bolt are properly torqued.
- Check and clean the firearm.
- Check for variations in the ammunition.

Intermittent LED Dot Illumination during live fire:

- Re-torque the battery cap to 10 in-lbs.
- Replace the battery or remove the battery and clean the circuit board contacts and battery surfaces.