



ROMEO4M™

1x20mm COMPACT RED DOT SIGHT

OWNERS MANUAL



INTRODUCTION

The ROMEO4M Compact Red Dot Sight includes thread-in flip-backs, ARD / Kill-Flash, low and 1.41" Torx mounts, adjustment tool, battery and operating instructions. The ROMEO4 is covered by SIG SAUER Electro-Optics Infinite Guarantee and SIG SAUER Electronic Component Limited 5-Year Warranty.

CONTENTS:

- ROMEO4M 1x20mm Compact Red Dot Sight
- CR2032 Coin Cell Battery (1)
- Thread-in Flip-backs and ARD/ Kill-Flash
- Low Profile Torx Mount
- 1.41" Torx Mount
- Lens Cloth
- Torx and Battery Removal Tool

KEY FEATURES:

- High performance coatings for excellent light transmittance and red dot contrast in all situations
- Compact size, weight with unlimited eye-relief and parallax free operation
- 2 MOA Dot or 2 MOA Dot / 65 MOA Circle Dot dual reticle
- Thread-in flip-backs and ARD / Kill-Flash
- MOTAC™ – Motion activated illumination control powers up when it senses motion and powers down when at rest. Extends the LED runtime in excess of 50,000 hours in normal use
- Low profile and 1.41" M1913 absolute co-witness riser mounts with each sight
- Milled from aircraft grade CNC aluminum ensures a lifetime of reliable service
- Side loading CR2032 coin cell for 50,000+ hours of continuous use at medium setting
- Dependable waterproof IPX-8 (33 ft for 30 minutes)) and fog proof performance
- SIG SAUER® Electro-Optics Infinite Guarantee™ and SIG SAUER Electronic & Tritium Component Limited 5-Year Warranty

PRODUCT IDENTIFICATION


A – (+) Illumination Control – Turn ON/OFF or Increase Brightness

B – (-) Illumination Control – Turn ON/OFF or Decrease Brightness


C – CR2032 Coin Cell Side Mounted Battery Cap

D – Elevation Adjustment

E – Windage Adjustment



ROMEO4 SPECIFICATIONS	
Dot Size	2 MOA Dot or 65 MOA Circle Dot
Mag	1x
Clear Aperture	.787 in / 20mm
Illumination Settings	10 Day / 2NV
Elevation Adjustment Range	+/- 50 MOA
Windage Adjustment Range	+/- 50 MOA
Weight	3.2 oz / 91 g

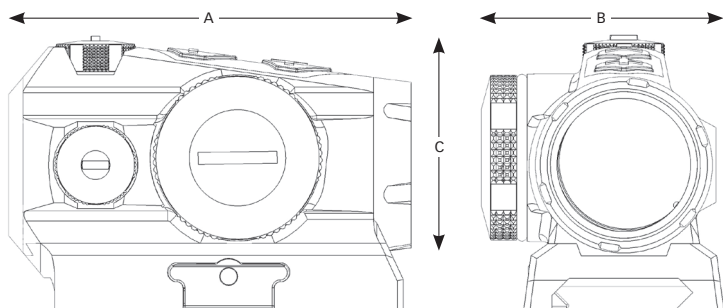

A – 2.65 in / 67mm

B – 1.6 in / 41mm

C – 1.4 in / 36mm






! WARNING

Before working on your ROMEO4 sight always ensure that the firearm is unloaded with the safety on.

OPERATION


Installing the battery

The battery compartment is located on the right side of the sight. Remove the battery cap by rotating the cap in the counter-clockwise (CCW) direction. Insert the CR2032 coin cell battery negative (-) contact first. The positive (+) contact should be facing outward. Reinstall the battery cap by rotating the cap in the clockwise (CW) direction until finger tight.




Turning Sight On and Off / Illumination Control

- On/Off buttons and illumination control is located on the top of the sight. Press and hold either the (+) or (-) button for more than 1 second to turn the sight on.
- To turn the sight off press and hold either the (+) or (-) button for more than 1 second.
- Once the dot or circle dot is illuminated, you can increase the apparent brightness by pressing and releasing the (+) button; or decrease the brightness by pressing and releasing the (-) button.
- The ROMEO4M comes with a dual reticle feature. To toggle between a dot or circle dot aiming feature press and hold both the (+) and (-) buttons until the reticle changes.
- The sight features MOTAC™ and will automatically turn off after 120 seconds of nonuse. As soon as the sight senses motion it will automatically power back on to the current setting.
- The sight has 12 illumination settings, 10 daytime and 2 NV.




MOUNTING THE SIGHT

- The low profile Torx mount that comes with your ROMEO4 is designed for direct low mounting of the red-dot sight. Simply loosen the T10 Torx cross-slot bolt with the provided tool; install on your rail and retighten to approximately 18-20 in/lbs.
- An additional riser mount is provided with each sight. The riser mount is designed to be an absolute or true co-witness to most iron sights with a nominal mount height of 1.41 inches. A Torx cross-slot riser mount is provided.
- The ROMEO4 was designed for use on most types of firearms that utilize the MIL-STD 1913 Picatinny Rail or Weaver style rails. Because the ROMEO4 has infinite eye relief, the sight can be mounted anywhere on the firearms rail system forward or back.



SIGHT ADJUSTMENTS

- Windage and elevation adjustments are located on the rear top and rear right side of the sight. They each come with caps that when removed, can be used to make adjustments to the point of aim of your sight.
- Elevation adjustments - the elevation adjustment is on the top of your sight. To raise your point of impact turn the adjustment CCW with the cap or a coin. Each click is equal to 0.5 MOA. To lower the point of impact turn the adjustment clockwise (CW).
- Windage adjustments - the windage adjustment is on the right side of your sight. To shift your point of impact to the right turn the adjustment CCW with the cap or a coin. Each click is equal to 0.5 MOA. To shift the point of impact to the left turn the adjustment clockwise (CW).



MAINTENANCE

- Cleaning – Keep your lenses clear by using a soft cloth or lens pen. The best way to maintain image quality is by keeping your lenses clear of dirt and dust that cause scratches.
- Always use your sight cover to ensure that the sight optics remain scratch free.

TROUBLESHOOTING

POI changes between groups

- Check that the mount is affixed tightly to the rail
- Check/Clean your firearm
- Check for variations in ammunition



SIG SAUER Electro-Optics Infinite Guarantee™

SIG SAUER has manufactured the most rugged, dependable high-performance firearms for over two centuries. Our

heritage of design, engineering and precision-manufactured quality predates the existence of any other optics company worldwide. We understand the importance of quality in the line of fire, at the shooting range or on your next hunt. SIG SAUER Electro-Optics had to earn the right to wear that badge and the Infinite Guarantee has your back, forever. Period.

We will repair or replace your SIG SAUER product in the event it becomes damaged or defective, at no charge to you. If we cannot repair your product, we will replace it with a product in perfect working order of equal or better physical condition. It doesn't matter how it happened, whose fault it was, or where you purchased it.

SIG SAUER Infinite Guarantee™

- Unlimited Lifetime Guarantee
- Fully Transferable
- No Warranty Card Required
- No Receipt Required
- No Time Limit Applies
- No Charge

If you ever have a problem, no matter the cause, we promise to take care of you when it counts. Please note that our Infinite Guarantee does not provide coverage for intentional damage, misuse, cosmetic damage that does not affect the performance of the optic, loss, theft or unauthorized repair or modification. Excludes electronic components.



SIG SAUER Electronic & Tritium Component Limited 5-Year Warranty

For components not included under the SIG SAUER® Infinite Guarantee™, this warranty

covers any defects in materials and workmanship in the electronic and Tritium components of illuminated riflescopes/sights, pistol sights, electronic sights, flashlights, lasers, binoculars, spotting scopes, and rangefinders. This warranty lasts for five years from the date of manufacture. If, during that five-year period, these products are found to have electronic or Tritium component defects in materials or workmanship, SIG SAUER will repair your product, at no charge to you. If we cannot repair your product, we will replace it with a product in perfect working order of equal or better physical condition.

**FOR PRODUCT SERVICE ON THIS MODEL,
PLEASE CALL 603-610-3000**

19861 SW 95th Avenue, Portland, OR 97062 USA

SIG SAUER®
when it counts®