



ROMEO®

ROMEO3™ 1x25mm MINIATURE REFLEX SIGHT

SIGSAUER



TABLE OF CONTENTS

Introduction
Contents
Key Features
Product Identification
Operation
Mounting The Sight10
Sight Adjustments11
Maintenance
Troubleshooting
Specifications
SIG SAUER® Electro-Optics Infinite Guarantee®/Limited Lifetime Warranty 16 $$
SIG SAUER Electronic Component Limited 5-Year Warranty

Visit sigsauer.com for Owners Manual downloads.

INTRODUCTION

The ROMEO3TM Reflex Sight is the ideal sighting solution for MSR/AR rifles, shotguns, carbines, submachine guns, or full size handguns. The ROMEO3 comes standard with a STANAG compliant M1913 Picatinny interface (some models include a 1.41" riser mount). The ROMEO3 Reflex Sight features a high transmittance red notch reflector for excellent brightness, light transmittance and zero distortion. A 3MOA Red Dot with multiple intensity settings ensures rapid target engagement under a full range of lighting conditions. Featuring MOTACTM (Motion Activated Illumination System) that powers up when it senses motion and powers down when it does not providing optimum operational safety and enhanced battery life. The readily available CR2032 battery is side-loading, allowing for quick battery replacement without having to remove the sight from the firearm. The extremely strong and lightweight aircraft grade aluminum housing ensures a lifetime of reliable service.

The ROMEO3 Reflex Sight includes lens cover, adjustment tool, battery and operating instructions. The ROMEO3 is covered by SIG SAUER® Electro-Optics Infinite Guarantee®/Limited Lifetime Warranty and SIG SAUER Electronic Component Limited 5-Year Warranty.

CONTENTS:


- ROMEO3™ 1x25mm Miniature Reflex Sight
- CR2032 Battery (1)
- Sight Cover
- Mount (some sights will ship with multiple mounts)
- · Lens cloth
- Hex Keys


KEY FEATURES:

- · High transmittance red notch reflector for excellent brightness, light transmittance, and zero distortion
- 3 MOA Dot with multiple intensity settings for rapid target engagement under a full range of lighting conditions
- MOTAC™ (Motion Activated Illumination System) powers up when it senses motion and powers down
 when it does not
- Aircraft grade CNC Aluminum housing ensures a lifetime of reliable service
- Dependable waterproof (IPX-7 rated for complete water immersion up to 1 meter) and fogproof performance
- SIG SAUER® Electro-Optics Infinite Guarantee®/Limited Lifetime Warranty and SIG SAUER Electronic Component Limited 5-Year Warranty.

PRODUCT IDENTIFICATION:

- A- Reticle Intensity Increase Button
- B- Reticle Intensity Decrease Button
- C- Battery Tray
- D- Base Mount Screw
- E- Windage Adjustment
- F- Elevation Adjustment
- G- Windage and Elevation Adjustment Lock Screw
- H- Mount Screws



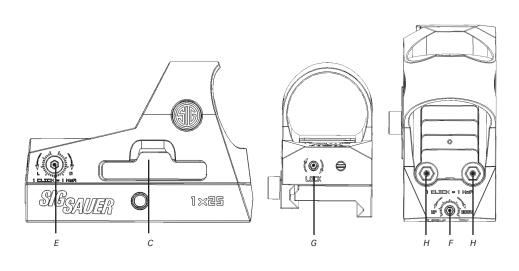




WARNING


Before working on your ROMEO3 sight always ensure that the firearm is unloaded with the safety on.


OPERATION

Installing the battery

The battery is located in a battery tray that can be accessed from the right side of the sight. Use a flat object to open the tray (To avoid damaging the anodized surface, use a plastic object or an object wrapped in electrical tape). Slide the tray out and replace the CR2032 battery positive side up. Slide the tray back into its original closed position.









Turning Sight On and Off

- Turn the sight on by pressing either the ▲ or ▼ power selector button.
- To turn the sight off, press and hold either the ▲ or ▼ power selector button for 3 seconds.
- The sight also features MOTAC™. Causing it to automatically turn off after 90 seconds if no motion is detected. As soon as the sight senses motion it will automatically power back on to the last setting.
- The ROMEO3 has 11 illumination settings, 9 daytime and 2 NV. To increase the intensity of your 3 MOA dot press the ▲ button on the left side of the sight. To decrease the intensity press the ▼ button.

MOUNTING THE SIGHT

- Selecting your mount- Some models of ROMEO3 sights come with two
 mounts, a low-rise mount or a 1.41" co-witness mount. In order for the
 ROMEO3 to co-witness with your standard AR platform iron sights you
 will need to use the 1.41" co-witness riser. Most other applications will
 require the low-rise mount.
- Once you have selected the correct base for your sight you will need to secure the sight to the base. This is done with two mounting screws at the top of the sight. Align the sight on the base and tighten these two screws to 1.5 Nm (15 in-lbs).
- The ROMEO3 was designed for use on most types of firearms that utilize
 the MIL-STD 1913 Picatinny Rail. Because the ROMEO3 has infinite eye
 relief, the sight can been mounted anywhere on the firearms rail system
 forward or back. Make sure that there is access to the sights lock
 screw at the rear of your sight. Tighten down the ROMEO3 base to the
 MIL-STD 1913 rail 2 Nm (18 in-lbs).






SIGHT ADJUSTMENTS

 You must always loosen the lock screw at the rear of your sight before making windage or elevation adjustments. Loosen the lock screw by turning it counter-clockwise

▲ CAUTION – Failure to loosen the lock screw before making changes to your windage and elevation adjustments will damage the sight.




- Elevation adjustments the elevation adjustments are on the top of your sight. To raise your point of impact, with the provided Allen key, turn the adjustment counter-clockwise. Each click is equal to 1 MOA.
 To lower the point of impact turn the adjustment clockwise.
- Windage adjustments the windage adjustments are on the right



side of your sight. To move your point of impact to the left, with the provided hex key, turn the adjustment counter-clockwise. Each click is equal to 1 MOA. To move the point of impact to the right turn the adjustment clockwise.

 Locking your point of impact adjustments – make sure that you always lock your windage and elevation adjustments. The lock screw is located at the rear of the sight. Turn the lock screw clockwise until it reaches 1 Nm (9 in-lbs)



▲ CAUTION - Failure to lock the windage and elevation adjustments will result in point of impact drift.

MAINTENANCE

- Cleaning Keep your lenses clear by using a soft cloth or lens pen. The best way to maintain image
 quality is by keeping your lenses clear of dirt and dust that cause scratches.
- Always use your sight cover to ensure that the sight optics remain scratch free.
- Replacing the battery- The battery is located in a battery tray that can be accessed from the right side of the sight. Use a flat object to open the tray. Slide the tray out and replace the CR2032 battery positive side up. Slide the tray back into its original closed position.


*Do not remove protective rubber material in upper right corner on the rear-facing surface of the sight. This material is integral for waterproofing

TROUBLESHOOTING

POI changes between groups

- Check that all of your mounts are tightened to the correct torque spec
- Check that the windage and elevation adjustments are locked
- · Check/Clean your firearm
- Check for variations in ammunition

ROMEO3 SPECIFICATIONS	
Magnification	1x25mm
Illumination Settings	9 Daytime / 2 NV
Window Height	.8 in / 21mm
Window Width	1.01 in / 25mm
Elevation Adjustment Range	40 MOA
Windage Adjustment Range	40 MOA
Weight	1.4 oz / 40 g
Battery	CR2032
Waterproofing	IPX7

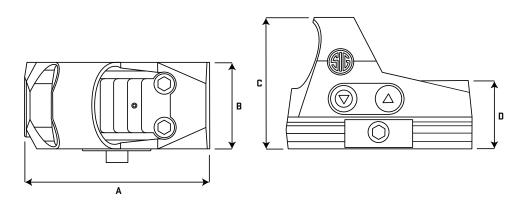

- A 2.3 in / 58mm
- B 1.2 in / 30mm
- C 1.7 in / 42mm
- D 1.3 in / 33mm



SIG SAUER® Electro-Optics Infinite Guarantee® / Limited Lifetime Warranty SIG SAUER has manufactured the most rugged, dependable, high-performance firearms for more than two centuries. Our heritage of design, engineering, and precision-manufactured quality predates the existence of any other optics company worldwide. We understand the importance of quality in the line of fire,

at the shooting range or on your next hunt. SIG SAUER Electro-Optics had to earn the right to wear that badge and the Infinite Guarantee has your back, forever. Period.

We will repair or replace your SIG SAUER product in the event it becomes damaged or defective, at no charge to you. If we cannot repair your product, we will replace it with a product in perfect working order of equal or better physical condition.

SIG SAUER Infinite Guarantee®

- Unlimited Lifetime Guarantee
- Fully Transferable
- No Warranty Card Required
- No Receipt Required
- No Time Limit Applies
- No Charge

Please note that our Infinite Guarantee excludes coverage for intentional damage, misuse, cosmetic damage that does not affect the performance of the optic, loss, theft, or unauthorized repair or modification. Excludes electronic and Tritium components.

Customers seeking warranty coverage must first obtain a Return Merchandise Authorization (RMA) by contacting SIG SAUER Customer Service, and return the product unloaded and freight prepaid.

ANY WARRANTIES IMPLIED BY LAW, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY DISCLAIMED. REPAIR, ALTERATION, OR REPLACEMENT AS PROVIDED HEREIN IS YOUR EXCLUSIVE REMEDY FOR ANY DEFECTIVE PRODUCT. IN NO EVENT SHALL SIG SAUER OR ANY COMPANY AFFILIATED WITH SIG SAUER BE LIABLE FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY KIND ARISING OUT OF THE PURCHASE OR USE OF THIS PRODUCT, WHETHER BASED UPON CONTRACT, TORT, STATUTE, OR OTHERWISE. Some states do not allow the exclusion or limitation of implied warranties, or the exclusion or limitation of incidental or consequential damages, so some or all of the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State.

THIS WARRANTY APPLIES TO COMMERCIAL CUSTOMERS ONLY, AND DOES NOT APPLY TO GOVERNMENT, MILITARY, LAW ENFORCEMENT, OR NON-US CUSTOMERS. NON-US COMMERCIAL CUSTOMERS MUST PURCHASE PRODUCT THROUGH AN AUTHORIZED SIG SAUER DEALER WITHIN THEIR COUNTRY OF RESIDENCE FOR THIS WARRANTY TO APPLY.



SIG SAUER® Electronic Component Limited 5-Year Warranty

SIG SAUER warrants that the electronic and tritium components of the enclosed product were originally manufactured free of defects in workmanship, material, and mechanical function. For a period of five (5) years from the date of manufacture, SIG SAUER agrees to correct any defect in these components by repair, adjustment, or

replacement, at SIG SAUER's option, with the same or comparable quality components (or by replacing the product at SIG SAUER's option); provided however that a Return Merchandise Authorization (RMA) is first obtained by contacting SIG SAUER Customer Service, and that the product is returned unloaded and freight prepaid.

This limited warranty is null and void if the product has been misused, damaged (by accident or otherwise), damaged through failure to provide reasonable and necessary maintenance as described in the user's manual, or if unauthorized repair or any alteration, including of a cosmetic nature, has been performed on the product. This limited warranty does not apply to normal cosmetic wear and tear of any parts.

ANY WARRANTIES IMPLIED BY LAW, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY DISCLAIMED. REPAIR, ALTERATION, OR REPLACEMENT AS PROVIDED HEREIN IS YOUR EXCLUSIVE REMEDY FOR ANY DEFECTIVE PRODUCT. IN NO EVENT SHALL SIG SAUER OR ANY COMPANY AFFILIATED WITH SIG SAUER BE LIABLE FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY KIND ARISING OUT OF THE PURCHASE OR USE OF

THIS PRODUCT, WHETHER BASED UPON CONTRACT, TORT, STATUTE, OR OTHERWISE. Some states do not allow the exclusion or limitation of implied warranties, or the exclusion or limitation of incidental or consequential damages, so some or all of the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State.

THIS WARRANTY APPLIES TO COMMERCIAL CUSTOMERS ONLY, AND DOES NOT APPLY TO GOVERNMENT, MILITARY, LAW ENFORCEMENT, OR NON-US CUSTOMERS. NON-US COMMERCIAL CUSTOMERS MUST PURCHASE PRODUCT THROUGH AN AUTHORIZED SIG SAUER DEALER WITHIN THEIR COUNTRY OF RESIDENCE FOR THIS WARRANTY TO APPLY.





FOR PRODUCT SERVICE ON THIS MODEL, PLEASE CALL 603-610-3000

27100 SW Parkway Avenue, Wilsonville, OR 97070 USA