



SIG SAUER

# ROMEO<sup>®</sup>

ROMEOZero™ MICRO OPEN REFLEX SIGHT

## OWNERS MANUAL

Please visit sigsauer.com for Owners Manual downloads.

### INTRODUCTION:

The ROMEOZero™ is a fast, accurate, ultra-compact micro reflex sight that has been optimized for everyday concealed carry and for pistols with slim slide profiles. The sight features a ruggedized, WeaponsGrade™ textured polymer body and the SpectraCoat™ HD Polymer lens system. The ROMEOZero enables rapid target acquisition in an everyday carry package at an iron sight price.

The ROMEOZero™ is covered by the SIG SAUER Electro-Optics Infinite Guarantee and Electronics & Tritium Component Limited 5-Year Warranty.

### KEY FEATURES:

- Available with either a 3 MOA or 6 MOA red dot
- SpectraCoat™ HD polymer lens
- WeaponsGrade™ ultralight polymer housing
- 8 user-selectable brightness levels
- MOTAC (Motion Activated Illumination System)
- Integrated backup rear sight (some models) for co-witnessing with your front iron sight
- Pre-zeroed from the factory, optimized for most optics-ready pistols
- Compatibility with SIG Sauer P365 Optics-Ready pistols, as well as many other popular pistols on the market
- Highly efficient point source LED emitter, for up to 20,000 hours of runtime from a common CR1632 coin cell battery


### CONTENTS:

- ROMEOZero™ Micro Open Reflex Sight
- (2) M3 X 0.5 Screws
- 2mm Allen Wrench (Mounting)
- (2) M4 X 0.7 Screws (not available with RXZ Pistols)
- .050" Allen Wrench (Windage/Elevation Adjustment)
- Die Cut Chemical Shield Decal
- Steel Protective Shroud (not available with RXZ Pistols)
- CR1632 Battery
- Owner's Manual

### PRODUCT IDENTIFICATION:

A: Windage Adjustment Screw  
B: Elevation Adjustment Screw  
C: Mount Screw Holes

D: Brightness Adjustment Button  
E: Battery Slot

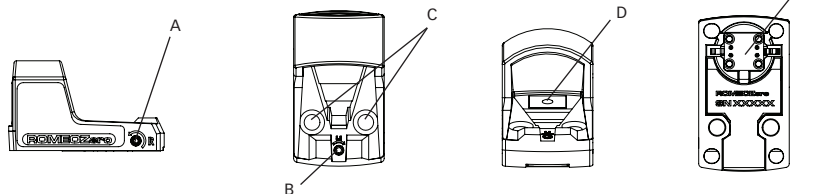


### INSTALLATION:

**IMPORTANT:** Prior to installation, battery change, cleaning or maintenance, ensure that the firearm is unloaded with the safety on and pointed in a safe direction.

**⚠ WARNING:** Do not remove the plastic seal decal underneath the optic that contains the serial number. Doing so may damage the product.

The ROMEOZero comes with 2 sets of screws (Fig 1). The M3 X 0.5 screws are meant for mounting the ROMEOZero to any Optics-Ready SIG SAUER P365 pistol. The M4 X 0.7 screws are included for installation on certain non-SIG pistols and accessory mounts that have been cut for other optics. The included screws may or may not be compatible with those other products, and you should consult the product manufacturer for compatibility information. Note: Only 1 set of mounting screws is included with RXZ pistols and ROMEOZero combo products. Additional screws are available through SIG SAUER Customer Service.



#### MOUNTING TO AN OPTICS-READY SIG P365 PISTOL:

Remove the Sight Plate from your P365 Optics-Ready pistol (consult the firearm operator's manual). Use a clean cloth to wipe any excess oil or solvent from the optics cut area of the pistol slide. Peel the included die cut chemical shield decal from its backing, and apply it carefully to the pistol slide optics cut area. This shield prevents solvents and hot gas from coming through the hole in the pistol slide and damaging the optic. Ensure that a new CR1632 coin cell battery is installed in the ROMEOZero, with the positive (+) side facing out, toward the pistol slide. Hold the battery in place with a finger or thumb while lowering the ROMEOZero into the optics cut of the pistol slide. If using the steel protective shroud, place the ROMEOZero (with battery installed) into the shroud before lowering it onto the pistol slide (Fig 2). Ensure that the raised threaded slots in the P365 pistol slide line up with the mount screw holes of the ROMEOZero. Using the included 2mm Allen wrench, insert the M3 X 0.5 screws through the ROMEOZero mount holes and thread them into the raised threaded slots of the P365 slide, until the screw heads make firm contact with the ROMEOZero housing. Turn the screws an additional 3/4 of a turn, clockwise. For best results, use an inch-pound torque wrench set to 9 in-lbs. NOTE – You should retorque the mount screws to 9 in-lbs. each time you remove the sight from the firearm, and after every 500 rounds fired.

**⚠ WARNING!** Over-torquing the mounting screws may cause issues with the windage and elevation adjustments. Use an inch-pound torque wrench set to 9 in-lbs for best results when mounting the ROMEOZero.

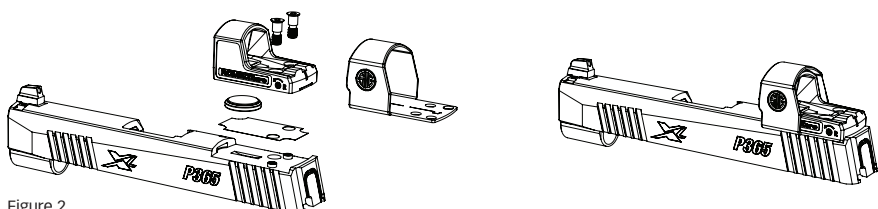


Figure 2

### OPERATION:

#### INSTALLING AND CHANGING THE BATTERY:

The ROMEOZero must be removed from the firearm to access the battery. The CR1632 coin cell battery is installed from underneath the sight. Insert the battery into the round battery slot with the positive (+) side facing out, toward the pistol slide, and temporarily hold it in place using a thumb or finger until you're ready to mount the sight onto the firearm.

## TURNING THE SIGHT ON/OFF AND ADJUSTING THE DOT BRIGHTNESS:

There are a total of 8 brightness levels on the ROMEOZero. The brightness adjustment button is located just behind the lens. To turn the sight on, use the tip of a finger to press and hold the brightness adjustment button for 2 seconds. To turn the sight off, press and hold the brightness adjustment button again for 2 seconds. To adjust the brightness of the dot, press and release the button to raise the dot brightness 1 level. Continue to press and release the button until the desired brightness level is reached. Once the dot reaches the brightest level, it will blink 5 times. Subsequent button presses will lower the dot brightness 1 level at a time until the lowest brightness level is reached. The dot will blink 5 times and subsequent button presses will begin raising the dot brightness again. NOTE – Care should be taken not to touch or scratch the rear surface of the lens while accessing the brightness adjustment button.

The ROMEOZero utilizes MOTAC (Motion Activated Illumination System). While the optic is on, if no motion is detected for 2 minutes, the illuminated dot will automatically turn off to conserve battery life. As soon as the sight senses motion, it will automatically turn on to the last brightness setting used.

## WINDAGE AND ELEVATION ADJUSTMENT:

**NOTE** – The illuminated dot of the ROMEOZero has been adjusted to mechanical center at the factory. Therefore, the optic will be very close to zeroed when installed, and should only require minor adjustment to bring point of aim and point of impact together.

### ADJUSTING ELEVATION:

To raise your point of impact, use the included .050" Allen wrench to turn the elevation screw clockwise. To lower your point of impact, turn the adjustment screw counter-clockwise.

### ADJUSTING WINDAGE:

To move your point of impact left, use the included .050" Allen wrench to turn the windage screw clockwise. To move your point of impact right, turn the adjustment screw counter-clockwise.

**⚠ WARNING! Do not adjust the windage or elevation adjustments while the optic is removed from the pistol or mount surface. Doing so may cause damage to the optic. Never force the adjustment screws beyond their limits of travel.**

## CLEANING & MAINTENANCE:

After repeated fire, the lens may become clouded with gunpowder residue. For best results, it is recommended that the outer surface of the lens (the side closest to the muzzle) be cleaned, along with the firearm, after each use. To clean the lens, follow these steps:

1. Keep firearm pointed in a safe direction
2. Ensure firearm is unloaded
3. Dampen the end of a cotton swab with isopropyl alcohol
4. Apply dampened swab to lens and polish in a small circular pattern, beginning in the center and moving out to the edges.

If the ROMEOZero is mounted on a pistol that gets carried inside or underneath clothing on a regular basis, it is possible to collect clothing fibers or lint in the emitter area, causing a temporary loss or change in appearance of the red dot. With the firearm unloaded with the safety on and pointed in a safe direction, use compressed air to blow out the emitter area on the ROMEOZero, located on top of the sight, between the mount screw holes.

The ROMEOZero™ should never be submerged or flushed with cleaning solvents.

## TROUBLESHOOTING:

### POINT OF IMPACT CHANGES BETWEEN GROUPS, WHILE SHOOTING FROM A SET DISTANCE:

- Check that the mounting screws are torqued to 9 in-lbs.
- Check for variations in your ammunition
- Check/clean your firearm

### SIGHT WILL NOT TURN ON:

- Install a fresh CR1632 coin cell battery. Press and hold the brightness adjustment button for at least 2 seconds. It is also possible that the sight is on but set at a low brightness setting. Move to a dark room to see if the illuminated dot is turned down to a low setting, and use the brightness adjustment button to raise the dot brightness.

### RED DOT SUDDENLY CHANGES SHAPE OR BECOMES BLURRY:

- Use compressed air to blow out the emitter area, located on top of the sight, between the two mount screw holes

## ROMEOZero SPECIFICATIONS

Sight Window	.72 in x .61 in / 18.3 mm x 16.4 mm
Battery	CR1632
Overall Windage Adjustment	50 MOA
Overall Elevation Adjustment	50 MOA
Brightness Settings	8 Daytime Settings
Battery Life	Up to 20,000 hours
Weight	0.4 oz / 14 grams



**⚠ WARNING: CANCER AND REPRODUCTIVE HARM – [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**



### SIG SAUER ELECTRO-OPTICS INFINITE GUARANTEE™

SIG SAUER has manufactured the most rugged, dependable high-performance firearms for over two centuries. Our heritage of design, engineering and precision-manufactured quality predates the existence of any other optics company worldwide. We understand the importance of quality in the line of fire, at the shooting range or on your next hunt.

SIG SAUER Electro-Optics had to earn the right to wear that badge and the Infinite Guarantee has your back, forever. Period.

We will repair or replace your SIG SAUER product in the event it becomes damaged or defective, at no charge to you. If we cannot repair your product, we will replace it with a product in perfect working order of equal or better physical condition. It doesn't matter how it happened, whose fault it was, or where you purchased it.

### SIG SAUER INFINITE GUARANTEE™

- Unlimited Lifetime Guarantee
- No Receipt Required
- Fully Transferable
- No Time Limit Applies
- No Warranty Card Required
- No Charge

If you ever have a problem, no matter the cause, we promise to take care of you when it counts. Please note that our Infinite Guarantee does not provide coverage for intentional damage, misuse, cosmetic damage that does not affect the performance of the optic, loss, theft or unauthorized repair or modification. Excludes electronic components.



### SIG SAUER ELECTRONIC & TRITIUM COMPONENT LIMITED 5-YEAR WARRANTY

For components not included under the SIG SAUER® Infinite Guarantee™, this warranty covers any defects in materials and workmanship in the electronic and Tritium components of illuminated riflescopes/sights, pistol sights, electronic sights, flashlights, lasers, binoculars, spotting scopes, and rangefinders. This warranty lasts

for five years from the date of manufacture. If, during that five-year period, these products are found to have electronic or Tritium component defects in materials or workmanship, SIG SAUER will repair your product, at no charge to you. If we cannot repair your product, we will replace it with a product in perfect working order of equal or better physical condition.

**FOR PRODUCT SERVICE ON THIS MODEL,  
PLEASE CALL 603-610-3000**  
27100 SW Parkway Ave., Wilsonville, OR 97070 USA

**SIG SAUER**